


## Three-Terminal Negative Voltage Regulator

### 79L08

#### ■ Features

- Maximum output current  $I_{OM}$  : 0.1A.
- Output voltage:  $V_o$  : -8V.
- Continuous total dissipation  $P_D$ : 0.5 W

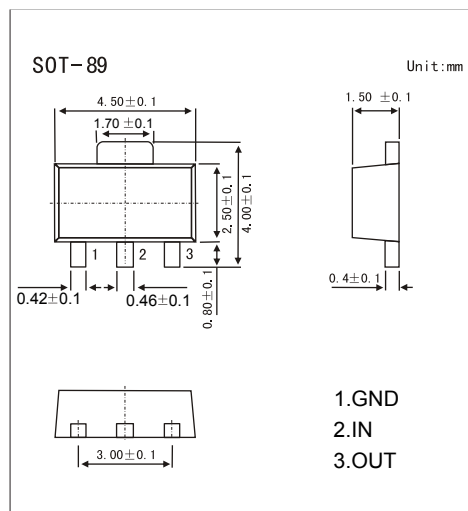

#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input Voltage	$V_i$	-30	V
Operating junction temperature range	$T_{OPR}$	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150	$^\circ\text{C}$

#### ■ Electrical Characteristics ( $V_i = -14\text{V}, I_o = 40\text{mA}, 0^\circ\text{C} < T_j < 125^\circ\text{C}, C_1 = 0.33 \mu\text{F}, C_o = 0.1 \mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	$V_o$	$T_j = 25^\circ\text{C}$	-7.7	-8.0	-8.3	V
		$-10.5\text{V} \leq V_i \leq -23\text{V}, I_o = 1\text{mA} - 40\text{mA}$	-7.6	-8.0	-8.4	V
		$I_o = 1\text{mA} - 70\text{mA}$	-7.6	-8.0	-8.4	V
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}, I_o = 1\text{mA} - 100\text{mA}$		30	100	mV
		$T_j = 25^\circ\text{C}, I_o = 1\text{mA} - 40\text{mA}$		15	50	mV
Line regulation	$\Delta V_o$	$-10.5\text{V} \leq V_i \leq -23\text{V}, T_j = 25^\circ\text{C}$		42	200	mV
		$-11\text{V} \leq V_i \leq -23\text{V}, T_j = 25^\circ\text{C}$		36	150	mV
Quiescent current	$I_q$	$25^\circ\text{C}$		4	6	mA
Quiescent current change	$\Delta I_q$	$0^\circ\text{C} < T_j < 125^\circ\text{C}, -11\text{V} \leq V_i \leq -23\text{V}$			1.5	mA
	$\Delta I_q$	$0^\circ\text{C} < T_j < 125^\circ\text{C}, 1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output noise voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{KHz}, T_j = 25^\circ\text{C}$		54		$\mu\text{V}$
Ripple rejection	RR	$-11\text{V} \leq V_i \leq -21\text{V}, f = 120\text{Hz}$	37	46		dB
Dropout voltage	$V_d$	$T_j = 25^\circ\text{C}$		1.7		V

#### ■ Typical Application

